



ELECTRONIC DEVICE PRODUCT CATALOG FOR AUTOMOTIVE 2017



Ricoh Electronic Devices Co., Ltd. (REDC) offers a wide range of innovative technologies for automotive applications from on-vehicle electrical equipment to in-vehicle accessory. REDC provides environmentally friendly products by utilizing merits of low current consumption and high output precision of CMOS technology. Process Technology and Circuit Design Technology realize high performance analog ICs that feature low power consumption, high accuracy and high efficiency. REDC is committed to providing a semiconductor device with the highest level of quality and reliability by restricting the device manufacturing only within REDC and the cooperative companies successfully passed our stringent inspections for automotive products.

The TS16949 Authorized Certification

REDC achieved the International Organization for Standardization's (ISO) Quality Management System (ISO 9001) Certification in 1992 and Quality Management System for Automotive Products (ISO/TS 16949) Certification in 2013. REDC is dedicated to supplying stable and high quality products that serve our customer's quality and safety needs. REDC's commitment to customer satisfaction is achieved by continuously improving our process and products and services.

* ISO/TS16949:2009

ISO/TS 16949:2009, in conjunction with ISO 9001:2008, defines the quality management system requirements for the design and development, production and, when relevant, installation and service of automotive-related products. The aim of ISO/TS 16949:2009 is the development of a quality management system that provides for continual improvement, emphasizing defect prevention and the reduction of variation and waste in the supply chain.



<ISO/TS16949>

ISO/TS 16949 Core Tools

APQP&CP (Advanced Product Quality Planning and Control Plan)

Over the process from product planning to mass production, REDC involves with the related teams such as sales, design, manufacturing, production management, purchasing and quality assurance sections.

FMEA (Failure Mode and Effects Analysis)

REDC takes actions to eliminate or reduce failures by systematically identifying potential failures in a process or a system and studying the consequences of those failures.

PPAP (Production Part Approval Process)

REDC ensures the design and production process to meet our client's requirements by means of sharing FMEA and control plan before product delivery.

SPC (Statistical Process Control)

REDC constructs the framework for ensuring the stable supply of products by using the SPC system to reduce the process variation and prevents the defects, variation and wastes of products.

MSA (Measurement Systems Analysis)

REDC employs the analysis method that can confirm the availability of measuring-equipment for the process control and products pass/fail judgments.

AEC-Q100

AEC-Q100 is a stress test qualification for integrated circuit for automotive applications defined by the Automotive Electronics Council (AEC). REDC's automotive products are AEC-Q100 compliant. Some of our automotive products are on the way to acquiring the AEC-Q100 qualification. The part operating temperature grades are defined as described in the right table:

Grade	Operating Temperature Range
Grade 0	-40°C to 150°C
Grade 1	-40°C to 125°C
Grade 2	-40°C to 105°C
Grade 3	-40°C to 85°C

AEC-Q100 Reliability Test Criteria

The reliability test compliant to AEC-Q100 requires a number of samples and test lots in addition to the extended temperature cycle test compared to the reliability test for consumer products. Please contact us for details.

	Automotive Products	Consumer Products
Quality Standard	AEC-Q100	EIAJ ED-4701
Number of Test Samples	77 or 45	32 or 22
Number of Test Lots	3 or 1	1
Grade 1 Temperature Cycling	-65°C to 150°C for 500 cycles	-65°C to 150°C for 100 cycles

Quality Rank and Quality Class for Automotive Products

REDC uses a different testing and quality control techniques for automotive products as compared with that of consumer products.

Quality Rank

REDC offers three different quality ranks for automotive products according to their applications.

Quality 	Quality Rank	Applications
	1	Safety-critical Parts (Operation Control System)
	2	General Equipment (Body System)
	3	Accessories

Quality Class

REDC offers five different quality classes for automotive products that are different in guaranteed operating temperature range. We support our client to select the best fit quality class for their automotive applications. Please note that you cannot use consumer products or automotive products in non-designated applications.

Quality Rank	Applications	Quality Class	Operating Temp. Range* ¹	Guaranteed Spec. Temp. Range* ²	Screening* ³			Reliability Test Time	Product Traceability
					Low	25°C	High		
Automotive Applications									
1	Safety-critical parts* ⁴	R8	−40°C to 110°C 125°C	−40°C to 110°C 125°C	●	●	●	2,000h	Sales, Manufacturing
2	General equipment* ⁵	H	−40°C to 85°C	−40°C to 85°C	●	●	●	2,000h	
		J	−40°C to 105°C	−40°C to 105°C					
		K	−40°C to 125°C	−40°C to 125°C					
3	Accessories	A	85°C −40°C to 105°C 125°C	25°C		●	●	2,000h	
Consumer Applications									
—	General	—	85°C −40°C to 105°C 125°C	25°C		●		1,000h	Sales

^{*1} The operating temperature range differs by product. Refer to the datasheet for details.

^{*2} The guaranteed specification temperature ranges of the H, J and K class products are currently shifting from 25°C to the full operating temperature ranges. As for the A class products, some of them are already guaranteed in the full operating temperature range. The guaranteed specification temperatures do not apply to some test items of the products.

^{*3} The screening was performed on all test items of the R8 class products. As for the H, J and K class products, the screening was performed on some of the test items.

^{*4} The R8 class products offer the highest quality obtained by the enhanced process inspection and quality control at manufacturing.

^{*5} The H, J and K class products can be selected at a time.

Traceability System

The manufacturers of automotive electronic products are required to take prompt actions, since their products are used in the life-critical systems, in case there is a failure or malfunction.

REDC has been established and maintained the traceability system to verify the production history and trace the destination of products by means of lot numbers. This traceability system is capable of tracking the product which belongs to the same lot as the failure product and verifying the quality of the product which uses same manufacturing device as the failure product.

Sales Traceability System is capable of controlling the warehousing and shipping of products, managing the first-in first-out method and tracking the destination of products by using lot numbers.

Manufacturing Traceability System is capable of managing the production history and tracking the source materials and manufacturing devices by using lot numbers.

Product Name Information

REDC's product name consists of the following information.

Product Name	Quality Class	Category Code	Series Code	Package Code	Voltage Code	Version Code	Taping Code	Quality Class Code ^{*1}	Pin Code
R8150S028B-E2-FE	R8	R81	50	S	028	B	-E2	-F	E
R1172H282B-T1-HE	H	R11	72	H	282	B	-T1	-H	E
R1514H028B-T1-JE	J	R15	14	H	028	B	-T1	-J	E
R5104V008B-E2-KG	K	R51	04	V	008	B	-E2	-K	G
R1172S282B-E2-AE	A	R11	72	S	282	B	-E2	-A	E
RP506L001N-TR-A	A	RP5	06	L	001	N	-TR	-A	-

^{*1} Note that the Quality Class Code of the R8 product is "F".

Package Information

REDC's automotive products are halogen-free products only.
Please refer to our website for additional details.

 : Products Newly Released

DFN

Pin	Symbol	Package	Actual Size	Top/Bottom View	Dimensions (mm)				Power Dissipation ² (mW)		Pin Plating Code	Taping Direction	Quantity/ Reel
					Body Size	Mount Area	Thickness	Pitch	T _{jmax} =125°C	T _{jmax} =150°C			
4	L	DFN1212-4			1.2×1.2	1.2×1.2	0.8 ³	0.5	455	568	–	TR	3,000
8	L	DFN2020-8			2.0×2.0	2.0×2.0	0.8 ³	0.5	880	1100	–	TR	3,000
8	L	DFN2020-8B			2.0×2.0	2.0×2.0	0.8 ³	0.5	880	1100	–	TR	3,000
12	L	DFN3030-12			3.0×3.0	3.0×3.0	0.8 ³	0.5	1950	2440	–	TR	3,000

SOT

Pin	Symbol	Package	Actual Size	Top/Bottom View	Dimensions (mm)				Power Dissipation ² (mW)		Pin Plating Code	Taping Direction	Quantity/ Reel
					Body Size	Mount Area	Thickness	Pitch	T _{jmax} =125°C	T _{jmax} =150°C			
5	N	SOT-23-5 (SC-74A)			2.9×1.6	2.9×2.8	1.1	0.95	420	525	E	TR	3,000
6	N	SOT-23-6 (SC-74)			2.9×1.6	2.9×2.8	1.1	0.95	420	525	E	TR	3,000
6	N	SOT-23-6W			2.9×1.8	2.9×2.8	1.1	0.95	430	–	E	TR	3,000
5	H	SOT-89-5			4.5×2.5	4.5×4.35	1.5	1.5	2200	2700	E	T1	1,000

SOP

Pin	Symbol	Package	Actual Size	Top/Bottom View	Dimensions (mm)				Power Dissipation ² (mW)		Pin Plating Code	Taping Direction	Quantity/ Reel
					Body Size	Mount Area	Thickness	Pitch	T _{jmax} =125°C	T _{jmax} =150°C			
8	G	SSOP-8G			2.9×2.8	2.9×4.0	1.3 ³	0.65	380	475	E	TR	3,000
10	V	SSOP-10			3.1×4.4	3.1×6.4	1.15	0.5	450	–	G	E2	2,000
6	S	HSOP-6J			5.02×3.9	5.02×6.0	1.65	1.905	2700	3400	E	E2	1,000
8	S	HSOP-8E			5.2×4.4	5.2×6.2	1.5	1.27	2900	3600	E	E2	1,000
18	S	HSOP-18			5.2×4.4	5.2×6.2	1.5	0.5	2500	3125	E	E2	1,000

TO

Pin	Symbol	Package	Actual Size	Top/Bottom View	Dimensions (mm)				Power Dissipation ² (mW)		Pin Plating Code	Taping Direction	Quantity/ Reel
					Body Size	Mount Area	Thickness	Pitch	T _{jmax} =125°C	T _{jmax} =150°C			
5	J	TO-252-5-P2			6.6×6.1	6.6×9.9	2.3	1.27	3800	4800	E	T1	3,000

QFN

Pin	Symbol	Package	Actual Size	Top/Bottom View	Dimensions (mm)				Power Dissipation ² (mW)		Pin Plating Code	Taping Direction	Quantity/ Reel
					Body Size	Mount Area	Thickness	Pitch	T _{jmax} =125°C	T _{jmax} =150°C			
24	K	QFN0404-24			4.0×4.0	4.0×4.0	0.75	0.5	1500	1860	–	E2	1,000
24	L	QFN0404-24B			4.0×4.0	4.0×4.0	0.75 ³	0.5	1500	1860	–	E2	1,000
32	L	QFN0505-32B			5.0×5.0	5.0×5.0	0.85 ³	0.5	1600	2000	–	E2	1,000

^{*1} Tab in the reverse side of the IC is GND or V_{DD} level. The tab is better to be connected to the GND or V_{DD}, but leaving it open is also acceptable.

^{*2} Please refer to our website for additional details. ^{*3} A maximum value.

Website of Ricoh Electronic Devices Co., Ltd.

Latest automotive products information and datasheets are available from here:

<http://www.e-devices.ricoh.co.jp/en/>



■ : Products in Development
 ■ : Products Newly Released
 ■ : AEC-Q100 Compliant
 : AEC-Q100 to be Compliant
Automatic : Automatic Shift to ECO Mode **Manual** : Manual Shift to ECO Mode
Thermal : Thermal Shutdown Circuit **Constant** : Constant Slope Circuit **Reverse** : Reverse Current Protection Circuit **Soft-Start** : Soft Start Circuit
Inrush : Inrush Current Limit Circuit **UVLO** : Undervoltage Lockout circuit **OVLO** : Overvoltage Lockout Function **OVP** : Overvoltage Protection Circuit
Discharge : Auto-discharge Function **Peak** : Peak Voltage **Ripple** : Ripple Rejection, Frequency=1kHz **Diode** : Diode Rectification
Synchro : Synchronous Rectification **PG** : Power Good Function **SSCG** : Spectrum Diffusion Type Oscillator **Sequencing** : Start-up Sequencing Control

Products Lineup

Voltage Regulator R8 Series

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Output Current (mA)	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Output Voltage Accuracy (%)		Dropout Voltage ¹ (V)			Supply Current (μA)	Remarks
							Ta=25°C	Ta=-40°C to 125°C ²	Typ.	Max.	Condition		
R8151H R8151S	R8	SOT-89-5 HSOP-6J	-40 to 110	50	4.0 to 36.0 (50.0)	2.0 to 12.0	±2.0	±4.0 (Ta=-40 to 110°C)	0.32	0.58	I _{OUT} =40mA	9	Peak ³ : 60V Thermal
R8150S		HSOP-6J											Peak ³ : 60V Thermal
R8160N R8160H R8160S	R8	SOT-23-5 SOT-89-5 HSOP-6J	-40 to 125	200	3.5 to 36 (50)	3.3, 3.4, 5.0, 6.0, 8.0, 8.5, 9.0	±0.6	±1.6	0.6	1.2	I _{OUT} =200mA	2.2	Peak ³ : 60V Thermal
R8153S R8153J		HSOP-6J TO-252-5-P2											Peak ³ : 60V Thermal
R8156S	R8	HSOP-8E	-40 to 125	300	3.5 to 36.0 (50.0)	1.2, 1.5, 1.8, 3.3, 3.4, 5.0 Ext. Adjustable: 1.2 to 18.0	±0.8	±1.0	0.32	0.60	I _{OUT} =300mA	75	Ripple : 70dB ⁴ Peak ³ : 60V Thermal Discharge : Ver. D
R8154S R8154J	R8	HSOP-6J TO-252-5-P2	-40 to 125	500	3.5 to 36.0 (50.0)	2.5, 2.8, 3.0, 3.3, 3.4, 5.0, 6.0, 8.0, 8.5, 9.0, Ext. Adjustable: 2.5 to 12.0	±0.8 Ext. Adjustable: ±20mV	±1.8 Ext. Adjustable: ±45mV	0.35	0.62	I _{OUT} =500mA	18	Constant : Ext. Adjustable Ver. E/F Peak ³ : 60V Thermal Discharge : Ver. D/F
R8152S R8152J		HSOP-6J TO-252-5-P2											Constant : Ext. Adjustable Ver. E/F Peak ³ : 60V Thermal Discharge : Ver. D/F
R8155S R8155J	R8	HSOP-6J TO-252-5-P2	-40 to 125	1A	3.0 to 24.0 (36.0)	3.0 to 18.0	±2.0	±4.0 (Ta=-40 to 110°C)	0.575	1.015	I _{OUT} =1A	70	Constant : Ext. Adjustable Ver. E/F Peak ³ : 60V Thermal Discharge : Ver. D/F
R8155S R8155J		HSOP-6J TO-252-5-P2											Constant : Ext. Adjustable Ver. E/F Peak ³ : 60V Thermal Discharge : Ver. D/F

¹ V_{SET}=5.0V ² The specifications of R8 Series are guaranteed at -40°C to 110°C or -40°C to 125°C. ³ Duration time=200ms ⁴ RR@f=100Hz

Voltage Detector R8 Series

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Detector Threshold Range (V)	Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Supply Current ² (μA)	Hysteresis	Remarks
R8300NxxxA/G R8300NxxxE	R8	SOT-23-6	-40 to 125	1.4 to 36.0 (50.0) 2.4 to 6.0 (7.0) SENSE: Max. 36.0 (50.0)	3.0 to 12.0	±1.5 (Ta=25°C) ±2.0 ¹ (Ta=-40 to 110°C)	-35, +40	3.8 3.5	-V _{DET} ×0.045(Min.) -V _{DET} ×0.055(Max.) G: Without Hysteresis Type	with delay function (External capacitor type) with delay function (External capacitor type) with SENSE pin
R8315NxxxA/B R8315NxxxE/F				1.4 to 36.0 (50.0) 3.6 to 6.0 (7.0) SENSE: Max. 36.0 (50.0)		±1.5 (Ta=25°C) ±2.0 ¹ (Ta=-40 to 110°C)	-35, +40 Detect Output Delay Time Accuracy -35, +40	3.8 3.5	Released Voltage Range: 5.3V to 11.0V Released Voltage Accuracy: ±1.5% (Ta=25°C) ±2.0% ¹ (Ta=-40 to 110°C)	with delay function (External capacitor type) with C _D pin (for Release output delay time setting) with C _R pin (for Detect output delay time setting) E, F: with SENSE pin A, E: Reset Signal "L" B, F: Reset Signal "H"

¹ The specifications of R8300N and R8315N are guaranteed at -40°C and 110°C. ² Detection released

Watchdog Timers

Watchdog Timer + Voltage Regulator + Voltage Detector (with Delay Function (External Capacitor Type)) R8 Series

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Voltage Regulator Part			Voltage Detector Part			Watchdog Timer Part			Supply Current (μA)	Remarks	
	R8				Output Voltage Range (V)	Output Voltage Accuracy (%)	Output Current (mA)	Detector Threshold Range (V)	Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Timeout Period*1 (ms)			Inhibit Pin		Typ.
											Min.	Typ.	Max.			
R8360Sxx1	R8	HSOP-8E	-40 to 125	3.5 to 36.0 (50.0)	1.8 to 5.0	±1.5*2	500	1.6 to 5.5	±1.8*2	±20*2	14.4	18	21.6	— ✓	25	Peak *3: 60V Window WDT selectable*4 Thermal Inrush
R8360Sxx2		HSOP-18														

¹ C_{TW}=0.01μF ² The R8360S is guaranteed specification for full operating temperature range. ³ Duration time=200ms

⁴ Window watchdog timer. Window watchdog timer monitors microprocessor activity and asserts a reset signal if the watchdog pulse does not occur within the defined time window (open window) or if the watchdog pulse occurs within the other defined time window (close window).

Watchdog Timer + Voltage Detector (with Delay Function (External Capacitor Type)) R8 Series

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Voltage Detector Part			Watchdog Timer Part			Supply Current (μA)	Remarks	
	Detector Threshold Range (V)				Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Timeout Period ¹ (ms)			Inhibit Pin			
							Min.	Typ.	Max.		Typ.		
R8355N	R8	SOT-23-6	-40 to 125	0.9 to 6.0 (7.0)	1.5 to 5.5	±1.0 (Ta=25°C)	±16 ²	230	310	450	—	11	Cd pin and Ctw pin are combined. with MR pin (Manual Reset)
R8356N	R8	SOT-23-6											
R8357G	R8	SSOP-8G											
R8358G	R8	SSOP-8G											
R8359G	R8	SSOP-8G											
				1.5 to 6.0 (7.0)		-2.8 ² +1.5 (Ta=-40 to 110°C)					✓		with SENSE pin
				0.9 to 6.0 (7.0)								11.5	2 clock input type

¹ C_{TW}=0.1μF ² The specifications of R835x Series are guaranteed at -40°C to 110°C.

Products Lineup

Lineup in Order of Input Voltage (Max.) and Output Current

Product Type		Max Input Voltage (V)	Output Current				
			Up to 150mA	Up to 300mA	Up to 500mA	Up to 1A	Up to 3A
High-performance		5.25			RP111x RP115L ^{*1}	RP115x ^{*1}	
		6	R1114N			R1172x	
		6.5	RP130x				
		36		R1513S R8156S			
Standard		5.25		RP154x			RP108J
		6				R1170H: 800mA	R1171S: 1.5A
		6.5				RP132x	
		8		R1130H			
		10	RP171N	RP170x			
		16				R1190x	
		24			R1500H	R1501x R8152x	
		36	R1516x	R1511x R8153x			
Low Supply Current		6	R1180N				
		24	R1150H +VD				
		36	R1515x: 50mA R1514x R8151x: 50mA R8150S	R1524x: 200mA R8160x: 200mA	R1517x R8154x	R1518x R8155x	
		42		R5112S +VD : 200mA			
		60	R1560x: 100mA R1561x: 100mA				
ECO Functions	Automatic Mode Shifting	36		R1510S +VD			
	Manual Mode Shifting	6	R1163N				
		16		R1191x			

*1 Output Current (I_{OUT}) is switchable between 500mA and 1A using the LCON pin of DFN2020-8.

Voltage Regulators

Product Name	Automotive Class		Package	Operating Temperature Range (°C)	Output Current (mA)	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Output Voltage Accuracy (%)	Dropout Voltage ^{*1} (V)			Supply Current (μA)	Remarks
	H/J/K	A							Typ.	Max	Condition	Typ.	
R1515H R1515S	J	A	SOT-89-5 HSOP-6J	-40 to 105	50	4.0 to 36.0 (50.0)	2.0 to 12.0	±2.0	0.20	0.35	I _{OUT} =20mA V _{SET} =5.0V	9	Peak ^{*4} : 60V Thermal
R1560S R1560J	K	A	HSOP-6J TO-252-5-P2	-40 to 125	100	5.0 to 60.0 (80.0)	1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0	±0.8	1.30		I _{OUT} =100mA V _{SET} =5.0V	3	Peak ^{*4} : 90V Thermal
R1561S R1560J	K	A	HSOP-6J TO-252-5-P2	-40 to 125	100	5.0 to 60.0 (80.0)	1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0	±0.8	1.30		I _{OUT} =100mA V _{SET} =5.0V	20	Peak ^{*4} : 90V Thermal
R1114N		A	SOT-23-5	-40 to 85	150	2.0 to 6.0 (6.5)	1.5 to 4.0	±2.0	0.22	0.35	I _{OUT} =150mA	75	Ripple : 70dB Discharge : Ver. D
R1163N		A	SOT-23-5	-40 to 85	150	2.0 to 6.0 (6.5)	1.5 to 5.0	±1.5 ^{*2}	0.25 ^{*2}	0.35 ^{*2}	I _{OUT} =150mA	70 ^{*2} (6)	Ripple : 70dB ^{*2} Reverse Manual Discharge : Ver. D
R1180N	H	A	SOT-23-5	-40 to 85	150	1.7 to 6.0 (6.5)	1.2 to 3.6	±2.0	0.25	0.40	I _{OUT} =150mA	1	Low Supply Current
RP130L RP130N		A	DFN1212-4 SOT-23-5	-40 to 105	150	1.7 to 6.5 (7.0)	1.2, 1.5, 1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0	±1.0	0.32	0.51	I _{OUT} =150mA	38	Ripple : 80dB Discharge : Ver. D
RP171N	J	A	SOT-23-5	-40 to 105	150	2.6 to 10.0 (12.0)	1.2, 1.5, 1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0, 6.0	±1.0	0.40	0.60	I _{OUT} =150mA	23	Ripple : 70dB Thermal Constant Discharge : Ver. D
R1150H +VD	H	A	SOT-89-5	-40 to 85	150	Max. 24.0 (26.0)	2.1 to 14.0 Detector Threshold Range Ver. A: 2.3 to 15.0 Ver. B,C,D: 2.0 to 15.0	±2.0 VD: ±2.5	0.3	0.4	I _{OUT} =20mA	7	Built-in Voltage Detector A: V _{IN} detect (Normal type) B: SENSE detect (Normal type) C: V _{IN} detect (with delay function) D: V _{OUT} detect (with delay function) Thermal
R1514H R1514S	J	A	SOT-89-5 HSOP-6J	-40 to 105	150	4.0 to 36.0 (50.0)	2.0 to 12.0	±2.0	0.20	0.35	I _{OUT} =20mA V _{SET} =5.0V	9	Peak ^{*4} : 60V Thermal
R1516H R1516S	J	A	SOT-89-5 HSOP-6J	-40 to 105	150	4.0 to 36.0 (50.0)	1.8 to 6.2	±1.0	–	0.60	I _{OUT} =20mA V _{SET} =5.0V	29	Peak ^{*4} : 60V Thermal
R5112S +VD	K	A	HSOP-8E	-40 to 125	200	3.5 to 42.0 (50)	1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0 Detector Threshold Range B: 1.6 to 4.8 D: 2.9 to 4.8	±0.6 VD: ±0.6	0.6	1.2	I _{OUT} =200mA V _{SET} =5.0V	3.8	Peak ^{*4} : 60V Thermal
R1524N R1524H R1524S R1524SxxxH	K	A	SOT-23-5 SOT-89-5 HSOP-6J HSOP-8E	-40 to 125	200	3.5 to 36 (50)	1.8, 2.5, 2.8, 3.0, 3.3, 3.4, 5.0, 6.0, 8.0, 8.5, 9.0	±0.6	0.6	1.2	I _{OUT} =200mA V _{SET} =5.0V	2.2	Peak ^{*4} : 60V Thermal

Product Name	Automotive Class		Package	Operating Temperature Range (°C)	Output Current (mA)	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Output Voltage Accuracy (%)	Dropout Voltage ¹ (V)			Supply Current (μA)	Remarks
	H/J/K	A							Typ.	Max	Condition		
RP154L5xx 2ch RP154N 2ch		A	DFN2020-8 SOT-23-6	-40 to 105	300	1.4 to 5.25 (6.0)	0.8 to 3.7	±1	0.25	0.32	I _{OUT} =300mA	50 ³	Ripple : 75dB Discharge : Ver. B
R1130H	H		SOT-89-5	-40 to 85	300	2.5 to 8.0 (9.0)	1.5 to 5.0, Ext. Adjustable: 1.8 to 5.0	±2.0 Ext. Adjustable: ±36mV	0.25	0.34	I _{OUT} =100mA	50	Absolute Max. Ratings I _{OUT} =450mA
RP170N RP170H	K	A	SOT-23-5 SOT-89-5	A: -40 to 105 K: -40 to 125	300	2.6 to 10.0 (12.0)	1.2, 1.25, 1.5, 1.8, 2.5, 2.8, 2.9, 3.0, 3.3, 5.0, 6.0	±1.0	0.770	1.185	I _{OUT} =300mA V _{SET} =2.5V	23	Ripple : 70dB Thermal Constant Discharge : Ver. D
R1191N R1191H		A	SOT-23-5 SOT-89-5	-40 to 85	300	3.5 to 16.0 (18.0)	2.0 to 15.0	±1.5 ²	0.55 ²	0.75 ²	I _{OUT} =300mA V _{SET} =5.0V	50 ² (6)	Ripple : 70dB ² Thermal Reverse Manual Discharge : Ver. D
R1510S ±VD	J	A	HSOP-8E	-40 to 105	300	3.5 to 36.0 (50.0)	2.5 to 12.0 Detector Threshold Range Ver. A, B, C: 2.3 to 12.0 Ver. D: 2.3 to 10.6	±1.6 VD: ±1.9	1.0 ²	2.0 ²	I _{OUT} =300mA V _{SET} =5.0V	110 ² (12.5)	Built-in Voltage Detector A: V _{IN} detect (Normal type) B: SENSE detect (Normal type) C: V _{IN} detect (with delay function) D: V _{OUT} detect (with delay function) Automatic Thermal
R1511S R1511J	K	A	HSOP-6J TO-252-5-P2	-40 to 125	300	3.5 to 36.0 (50.0)	3.0 to 9.0, Ext. Adjustable: 3.0 to 12.0	±1.0 Ext. Adjustable: ±30mV	0.64	1.00	I _{OUT} =300mA V _{SET} =5.0V	100	Peak ⁴ : 60V Thermal
R1513S	K	A	HSOP-6J	-40 to 125	300	3.5 to 36.0 (50.0)	1.2, 1.5, 1.8, 3.3, 3.4, 5.0 Ext. Adjustable: 1.2 to 18.0	±0.8	0.32	0.60	I _{OUT} =300mA V _{SET} =5.0V	75	Ripple : 70dB ⁵ Peak ⁴ : 60V Thermal Discharge : Ver. D
RP111N RP111H RP111S	J	A	SOT-23-5 SOT-89-5 HSOP-6J	-40 to 105	500	1.4 to 5.25 (6.0)	0.7, 1.2, 1.5, 1.8, 2.5, 2.8, 3.0, 3.3, 3.4, Ext. Adjustable: 0.7 to 3.6	±0.8 Ext. Adjustable: ±18mV	0.23	0.34	I _{OUT} =500mA	80	Ripple : 75dB Thermal Inrush Discharge : Ver. D Load regulation: Typ. 1mV Load transient response accuracy ⁶ : Typ. -75mV/+45mV
R1500H	J	A	SOT-89-5	-40 to 105	500	4.0 to 24.0 (36.0)	3.0 to 12.0	±2.0	0.115	0.180	I _{OUT} =200mA V _{SET} =5.0V	70	Thermal
R1517S R1517J	K	A	HSOP-6J TO-252-5-P2	-40 to 125	500	3.5 to 36.0 (50.0)	2.5, 2.8, 3.0, 3.3, 3.4, 5.0, 6.0, 8.0, 8.5, 9.0, Ext. Adjustable: 2.5 to 12.0	±0.8, Ext. Adjustable: ±20mV	0.35	0.62	I _{OUT} =500mA V _{SET} =5.0V	18	Constant : Ext. Adjustable Ver. E/F Peak ⁴ : 60V Thermal Discharge : Ver. D/F
R1170H	H	A	SOT-89-5	-40 to 85	800	2.1 to 6.0 (7.0)	1.5 to 5.0	±2.0	0.12	0.18	I _{OUT} =300mA	80	Thermal
RP115Lxx2 RP115H		A	SOT-89-5 DFN2020-8B	-40 to 105	1A (500)	1.4 to 5.25 (6.0)	1.0, 1.2, 1.5, 1.75, 1.8, 2.5, 2.8, 3.0, 3.3, 3.4	±1.0	0.150 0.190	0.295 0.285	I _{OUT} =1A V _{SET} =1.8V	110	Ripple : 75dB, 80dB (V _{SET} ≤1.8V) Thermal Reverse Constant Inrush Discharge : Ver. D Load regulation: Typ. 1mV Temperature Characteristics: Typ. ±30ppm/°C
R1172N R1172Hxx2 R1172Sxx2	H	A	SOT-23-5 SOT-89-5 HSOP-6J	-40 to 85	1A	1.4 to 6.0 (6.5)	0.8 to 5.0	±2.0	0.05	0.10	I _{OUT} =300mA	60	Ripple : 70dB Thermal Inrush Discharge : Ver. D
RP132HxxxB/D RP132SxxxB/D RP132Jxx1B/D	J	A	SOT-89-5 HSOP-6J TO-252-5-P2	-40 to 105	1A	1.4 to 6.5 (7.0)	0.8, 1.2, 1.5, 1.8, 2.5, 3.0, 3.3, 5.0, Ext. Adjustable: 0.8 to 5.5	±1.0 Ext. Adjustable: ±15mV	0.52	0.72	I _{OUT} =1A	65	Ripple : 70dB Thermal Inrush Discharge : Ver. D
R1190S R1190J		A	HSOP-6J TO-252-5-P2	-40 to 85	1A	3.5 to 16.0 (18.0)	2.0 to 12.0	±1.5	1.1	1.85	I _{OUT} =1A V _{SET} =5.0V	150	Inrush : Ext. Adjustable Thermal Discharge : Ver. D
R1501S R1501J	J	A	HSOP-6J TO-252-5-P2	-40 to 105	1A	3.0 to 24.0 (36.0)	3.0 to 18.0	±2.0	0.575	0.900	I _{OUT} =1A V _{SET} =5.0V	70	Thermal
R1518S R1518J	K	A	HSOP-6J TO-252-5-P2	-40 to 125	1A	3.5 to 36.0 (50.0)	2.5, 2.8, 3.0, 3.3, 3.4, 5.0, 6.0, 8.0, 8.5, 9.0, Ext. Adjustable: 2.5 to 12.0	±0.8, Ext. Adjustable: ±20mV	0.70	1.30	I _{OUT} =1A V _{SET} =5.0V	18	Constant : Ext. Adjustable Ver. E/F Peak ⁴ : 60V Thermal Discharge : Ver. D/F
R1171Sxx2		A	HSOP-6J	-40 to 85	1.5A	2.1 to 6.0 (7.0)	1.5 to 5.0	±2.0	0.09	0.18	I _{OUT} =300mA	130	Thermal
RP108J		A	TO-252-5-P2	-40 to 105	3A	1.6 to 5.25 (6.0)	0.8, 1.2, 1.5, 1.8, 2.5, 3.0, 3.3 Ext. Adjustable: 0.8 to 4.2	±1.0	0.51	0.67	I _{OUT} =3A	350	Thermal Reverse Constant Discharge : Ver. D/F

¹ This value varies depending on the output voltage, V_{SET}=2.8V or close to 2.8V. (If described, value at the voltage.)

² at Fast Mode, () at Low Power Mode ³ Supply Current (I_{SS}) per channel. ⁴ Duration time=200ms ⁵ RR@f=100Hz ⁶ 1mA↔250mA (1/2 I_{OUT} (Max.))

●USB High-side Switches

Product Name	Automotive Class		Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	ON Resistance (mΩ)	Supply Current (μA)	Current Limit Threshold (A)	Short Current Limit (A)	Flag Delay Time(ms)	UVLO Detect Voltage (V)	Internal FET	EN	Protection	Remarks
	H/J/K	A													
R5523N	H		SOT-23-5	-40 to 85	2.2 to 5.5 (6.5)	130	20	1 (Typ.) 1.8 (Max.)	0.75 (Typ.) 1.5 (Max.)	10	1.8	Pch.	H/L	Constant current type	Soft-Start Thermal
R5524N001 R5524N002 R5524N004		A	SOT-23-5	-40 to 85	2.7 to 5.5 (6.0)	100	110	0.8 (Typ.) 0.98 (Max.) 1.55 (Typ.) 1.85 (Max.)	0.65 (Typ.) 0.8 (Max.)	20	2.4	Nch.	H	Latch-off type Constant current type	Soft-Start Thermal Discharge Reverse

Microcontroller Supervisor Features

Max. Operating Voltage (V)	Release Output Delay Time	Configuration	VD		VD and WDT		VD, VR and WDT		VD and VR		
			VD Monitors $\Rightarrow$ VIN	VSENSE	VIN	VSENSE	VOUT	VSENSE	VIN	VOUT	VSENSE
6	✓	Ext. Capacitor	R3116N/L	R3118N	R5105N R5106N R5107G R5109G R8355N R8356N R8357G R8359G	R5108G R8358G					
		Ini. Counter	R3134N								
24	✓	Ext. Capacitor							R1150HxxxA R1150HxxxC	R1150HxxxD	R1150HxxxB
36	✓	Ext. Capacitor	R3119NxxxA R3120NxxxA R3150NxxxA/B R3151NxxxA/B R8300NxxxA/G R8315NxxxA/B	R3119NxxxE R3120NxxxE R3150NxxxE/F R3151NxxxE/F R8300NxxxE R8315NxxxE/F			R5104V R5110Sxx1A/B R5111Sxx1A/B R8360Sxx1A/B	R5110Sxx2C/D R5111Sxx2C/D R8360Sxx2C/D	R1510SxxxC	R1510SxxxD	R1510SxxxB
42, 60	✓	Ext. Capacitor	R3160N (60V)	R3152N (42V)			R5114S (42V) R5115S (42V)			R5112S (42V)	R5112S (42V)

Voltage Detectors

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Detector Threshold Range (V)	Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Supply Current ^{*1} (μA)	Hysteresis	Remarks	
	H/J/K							A			Typ.
R3116L R3116N		A	DFN1212-4 SOT-23-5	-40 to 105	0.5 to 6.0 (7.0)	0.7 to 5.0	±0.8	±15	0.35	-VDET×0.04(Min.) -VDET×0.07(Max.)	with delay function (External capacitor type)
R3117N		A	SOT-23-5	-40 to 105	1.0 to 6.0 (7.0)	0.7 to 5.0	±1.0	—	0.29	-VDET×0.04(Min.) -VDET×0.07(Max.)	Normal type with SENSE pin
R3118N		A	SOT-23-5	-40 to 85	1.0 to 6.0 (7.0)	0.6 to 5.0	±1.5	±30	0.4	-VDET×0.04(Min.) -VDET×0.07(Max.)	with delay function (External capacitor type) with SENSE pin
R3119NxxxA	J		SOT-23-5	-40 to 105	1.2 to 36.0 (50.0)	2.3 to 12.0	±1.5	-50, +80	3.3	-VDET×0.035(Min.) -VDET×0.065(Max.)	with delay function (External capacitor type)
R3119NxxxE					2.1 to 6.0 (7.0) SENSE: 0 to 36.0 (50.0)			—			Normal type with SENSE pin
R3120NxxxA		A	SOT-23-5	-40 to 105	1.2 to 36.0 (50.0)	2.3 to 12.0	±1.5	-50, +80	3.3	-VDET×0.035(Min.) -VDET×0.065(Max.)	with delay function (External capacitor type)
R3120NxxxE					2.1 to 6.0 (7.0) SENSE: 0 to 36.0 (50.0)			—			Normal type with SENSE pin
R3134N		A	SOT-23-5	-40 to 85	0.75 to 6.0 (6.5)	1.0 to 5.0	±1.8	240ms±15	0.8	No Hysteresis	with delay function (Internal counter type)
R3150NxxxA/B	J		SOT-23-6	-40 to 105	1.4 to 36 (50.0)	5.0 to 10.0	±1.5	-35, +40	3.8	Released Voltage Range: 5.3V to 11.0V Released Voltage Accuracy: ±1.5%	with delay function (External capacitor type) with Co pin (for Release output delay time setting) with Cr pin (for Detect output delay time setting)
R3150NxxxE/F					3.6 to 6.0 (7.0) SENSE: Max. 36.0 (50.0)			Detect Output Delay Time Accuracy -35, +40	3.5		E, F: with SENSE pin A, E: Reset Signal "L" B, F: Reset Signal "H"
R3151NxxxA/B		A	SOT-23-6	-40 to 105	1.4 to 36 (50.0)	5.0 to 10.0	±1.5	-35, +40	3.8	Released Voltage Range: 5.3V to 11.0V Released Voltage Accuracy: ±1.5%	with delay function (External capacitor type) with Co pin (for Release output delay time setting) with Cr pin (for Detect output delay time setting)
R3151NxxxE/F					3.6 to 6.0 (7.0) SENSE: Max. 36.0 (50.0)			Detect Output Delay Time Accuracy -35, +40	3.5		E, F: with SENSE pin A, E: Reset Signal "L" B, F: Reset Signal "H"
R3152N	K	A	SOT-23-6	-40 to 125	3.0 to 42.0 (50.0)	UD: 1.6 to 4.8 OD: 2.0 to 5.9	±0.5	-40, +140	1.4	VOVDET, VUVDET × 0.005 (Min.) VOVDET, VUVDET × 0.015 (Max.)	with delay function (External capacitor type) with SENSE pin
R3160N	K	A	SOT-23-6	-40 to 125	2.7 to 60.0 (80.0)	10.0 to 48.0	±1.0	±50	1.6	-VDET × 0.034 (Min.) -VDET × 0.052 (Max.)	with delay function (External capacitor type)

*1 Detection released

Watchdog Timers

Watchdog Timer + Voltage Regulator + Voltage Detector (with Delay Function (External Capacitor Type))

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Voltage Regulator Part			Voltage Detector Part			Watchdog Timer Part			Supply Current (μA)	Remarks		
					Output Voltage Range (V)	Output Voltage Accuracy (%)	Output Current (mA)	Detector Threshold Range (V)	Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Timeout Period ⁴ (ms)					Inhibit Pin	
	H/J/K	A			Min.	Typ.	Max.										
R5104V	K		SSOP-10	-40 to 125	Max. 36.0 (50.0)	3.3 to 5.0	±2.0	Depends on Ext. Tr.	2.8 to 4.0	±2.0	–	200	300	510	✓ xxxA	60	Peak ^{*2} : 60V
R5110Sxx1	K	A	HSOP-8E HSOP-18	-40 to 125	3.5 to 36.0 (50.0)	1.8 to 5.0	±1.5 ^{*3}	500	1.6 to 5.5	±1.8 ^{*3}	±20 ^{*3}	14.4	18	21.6	– ✓	25	Peak ^{*2} : 60V Window WDT selectable ^{*4} Thermal Inrush
R5110Sxx2															– ✓		Thermal Inrush
R5111Sxx1	K	A	HSOP-8E HSOP-18	-40 to 125	3.5 to 36.0 (50.0)	1.8 to 5.0	±1.5 ^{*3}	300	1.6 to 5.5	±1.8 ^{*3}	±20 ^{*3}	14.4	18	21.6	– ✓	25	Peak ^{*2} : 60V Window WDT selectable ^{*4} Thermal Inrush
R5111Sxx2															– ✓		Thermal Inrush
R5114Sxx1	K	A	HSOP-8E HSOP-18	-40 to 125	3.5 to 42.0 (50.0)	3.3 to 5.0	±1.6 ^{*3}	250	2.5 to 4.8	±1.6 ^{*3}	±20 ^{*3}	14.4	18	21.6	– ✓	7	Peak ^{*2} : 60 V Thermal
R5114Sxx2															– ✓		Thermal
R5115Sxx1	K	A	HSOP-8E HSOP-18	-40 to 25	3.5 to 42.0 (50.0)	3.3 to 5.0	±1.6 ^{*3}	250	2.5 to 4.8	±1.6 ^{*3}	±20 ^{*3}	14.4	18	21.6	– ✓	7	Peak ^{*2} : 60 V Window WDT only ^{*4} Thermal
R5115Sxx2															– ✓		Thermal

*1 R5104V: Ctw=0.1μF, R5110S/R5111S/R5114S/R5115S: Ctw=0.01μF *2 Duration time=200ms

*3 The K class is guaranteed specification for full operating temperature range. The A class is guaranteed by design engineering at full operating temperature range.

*4 Window watchdog timer. Window watchdog timer monitors microprocessor activity and asserts a reset signal if the watchdog pulse does not occur within the defined time window (open window) or if the watchdog pulse occurs within the other defined time window (close window).

• Watchdog Timer + Voltage Detector (with Delay Function (External Capacitor Type))

Product Name	Automotive Class		Package	Operating Temperature Range (°C)	Operating Voltage Range (Absolute Max.) (V)	Voltage Detector Part			Watchdog Timer Part			Supply Current (μA)	Remarks	
	H/J/K	A				Detector Threshold Range (V)	Detector Threshold Accuracy (%)	Output Delay Time Accuracy (%)	Timeout Period*(ms)					Inhibit Pin
									Min.	Typ.	Max.	Typ.		
R5105N	J	A	SOT-23-6	-40 to 105	0.9 to 6.0 (7.0)	1.5 to 5.5	±1.0	±16 ⁻²	230	310	450	-	11	
R5106N	J	A	SOT-23-6											
R5107G	J	A	SSOP-8G											
R5108G	J	A	SSOP-8G											
R5109G	J	A	SSOP-8G									✓	11.5	2 clock input type

*1 Ctw=0.1μF *2 This specification is guaranteed by design engineering at -40°C to 105°C.

● DC/DC Converters

• High Voltage Step-down DC/DC Converters Lineup

Product Name	Ver.	Automotive Class		Package	Operating Temperature Range (°C)	Control	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Output Voltage Accuracy ^{*1} (%)	Frequency (kHz)	Output Current ^{*2} (A)	Protection Circuit	Remarks
		H/J/K	A										
R1245S	003A/G 003C/E 003B/H 003D/F	J	A	HSOP-8E	-40 to 105	PWM	4.5 to 30.0 (32.0)	Ext. Adjustable: A/B/C/D: 0.8 to 27.3, E/F: 0.8 to 25.8, G/H: 0.8 to 21.3	0.8V±1.0	A/B: 330 C/D: 500 E/F: 1000 G/H: 2400	1.2	Latch type Fold back type	Diode Soft-Start UVLO Thermal
R1245L	003A/C/E/G 003B/D/F/H	J	A	DFN2020-8									
R1270S	001A/B	K	A	HSOP-18	-40 to 125	PWM, PWM/VFM Auto Switching	3.6 to 34.0 (36.0)	Ext. Adjustable: 0.8 to 31.6	0.8V±1.0	Ext. Adjustable: 300 to 2400, Ext. Synchronizable with PLL Circuit	3	Fold back type (With Latch type)	Diode Soft-Start : Ext. Adjustable FLAG Output Function UVLO OVLO Thermal
R1272S	xxxA	K	A	HSOP-18	-40 to 125	Forced PWM, PWM/VFM Auto Switching	4.0 to 34.0 (36.0)	Ext. Adjustable: 0.7 to 5.3	0.64V±1.0	Ext. Adjustable: 250 to 1000, Ext. Synchronizable with PLL Circuit	External	Latch type or Hiccup type (Reset type)	Synchro Soft-Start : Ext. Adjustable UVLO OVP Thermal SSCG : Ver. 03x PG
R1273L	xxxA	A	A	QFN0505-32B	-40 to 125	Forced PWM, PWM/VFM Auto Switching	4.0 to 34.0 (36.0)	Ext. Adjustable: 0.7 to 5.3	0.64V±1.0	Ext. Adjustable: 250 to 1000, Ext. Synchronizable with PLL Circuit	14	Latch type or Hiccup type (Reset type)	Synchro Soft-Start : Ext. Adjustable UVLO OVP Thermal SSCG : Ver. 03x PG
R1275S	003x	K	A	HSOP-18	-40 to 125	Forced PWM	3.6 to 30.0 (36.0)	Ext. Adjustable: 3.3 to 5.0	0.64V±1.0	Ext. Adjustable: 2000, Ext. Synchronizable with PLL Circuit (1800 to 2200)	2	Hiccup type (Reset type)	Synchro Soft-Start : Ext. Adjustable UVLO OVLO Thermal SSCG : Ver. 003C PG
R1276S	001x/002x	K	A	HSOP-18	-40 to 125	Forced PWM, PWM/VFM Auto Switching	3.6 to 30.0 (36.0)	Ext. Adjustable: 001x: 0.7 to 6.0, 002x: 6.0 to 12.0	0.64V±1.0	Ext. Adjustable: 250 to 1000, Ext. Synchronizable with PLL Circuit"	3	Latch type or Hiccup type (Reset type)	Synchro Soft-Start : Ext. Adjustable UVLO OVLO Thermal SSCG : Ver. xxxC/D PG

• Low Voltage Step-down DC/DC Converters Lineup

Product Name	Ver.	Automotive Class		Package	Operating Temperature Range (°C)	Control	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Output Voltage Accuracy ^{*1} (mV)	Frequency (kHz)	Output Current ^{*2} (A)	Protection Circuit	Auto-Discharge	Remarks
		H/J/K	A											
RP506L	xx1G/K xx1H/L 001N 001M	K	A	DFN3030-12	-40 to 105	Forced PWM, PWM/VFM Auto Switching	2.5 to 5.5 or 2.5 to 4.5 (6.5)	0.8, 1.0, 1.1, 1.2, 1.3, 1.5, 1.8, 1.85, 3.0, 3.3 Ext. Adjustable: 0.8 to 4.0 Ext. Adjustable: 0.6 to 4.0	±1.5% 0.6V±9 0.6V±9	K, L, M: 1200 G, H, N: 2300	2	Latch type	- ✓ -	Synchro Soft-Start : Ext. Adjustable UVLO Thermal PG
RP510L	xx1G/4G xx1H/4H 001J/4J 001N/4N	K	A	DFN3030-12	-40 to 105	Forced PWM	2.5 to 5.5 (6.5)	0.8, 1.0, 1.1, 1.2, 1.3, 1.5, 1.8, 3.0, 3.3 Ext. Adjustable: 0.8 to 3.3	±1.0% 0.6V±6	2300	4	Ver. 1G/1H/1J/1N: Latch type, Ver. 4G/4H/4J/4N: Fold back type	- ✓ - ✓	Synchro Soft-Start : Ext. Adjustable UVLO Thermal PG
RP550L Dual	001B	A	A	DFN3030-12	-40 to 105	Forced PWM, PWM/VFM Auto Switching	2.3 to 5.5 2.3 to 4.5 (6.5)	Ext. Adjustable: 0.6 to 3.3	0.6V±9	2300	1×2ch	Latch type	-	Synchro Soft-Start UVLO Thermal

• PWM Step-up DC/DC Controller Lineup for LCD/ OLED/ CCD

Product Name	Ver.	Automotive Class		Package	Operating Temperature Range (°C)	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range	Voltage Accuracy ^{*1} (mV)	Frequency (kHz)	Output Tr.	Protection Circuit	Remarks
		H/J/K	A									
R1211N	002B/D		A	SOT-23-6W	-40 to 85	2.5 to 6.0 (6.5)	Ext. Adjustable	1.0V±15	B: 700 D: 300	External	Latch type	Int. phase compensation. with stand-by. Soft-Start UVLO

• Step-up and Charge Pump DC/DC Converters Lineup for LCD/ OLED/ CCD

Product Name	Automotive Class	Package	Operating Temperature Range (°C)	Control	Input Voltage Range (Absolute Max.) (V)	Output Voltage Range (V)	Voltage Accuracy ^{*4} (mV)	Frequency (kHz)	Lx Current Limit ^{*3} (A)	Remarks
		H/J/K								
R1290K		A	QFN0404-24	-40 to 105	CH1: PWM (Step-up) CH2: Charge pump (Positive) CH3: Charge pump (Negative)	2.0 to 5.5: 101A 2.5 to 5.5: 102A 3.3 to 5.5: 103A (6.5)	CH1: Up to 20.0, Ext. Adjustable CH2/3: Ext. Adjustable	CH1: 1.0V40, +25 CH2: 1.5V50, +35 CH3: 0V±35	Ext. Adjustable: 180 to 1400	CH1: 2 Sequencing Soft-Start : Ext. Adjustable UVLO
R1294L	J	A	QFN0404-24B	-40 to 105	CH1: PWM (Step-up) CH2: Charge pump (Positive) CH3: Charge pump (Negative)	2.0 to 5.5: 101A 2.5 to 5.5: 102A 3.3 to 5.5: 103A (6.5)	CH1: Up to 20.0, Ext. Adjustable CH2/3: Ext. Adjustable	CH1: 1.0V40, +25 CH2: 1.5V50, +35 CH3: 0V±35	Ext. Adjustable: 210 to 1400, 800-10%, +14% ^{*4}	CH1: 2 Sequencing Soft-Start : Ext. Adjustable UVLO

*1 When the output voltage is adjusted by external resistors, the value means the feedback voltage accuracy. *2 This is an approximate value, because output current depends on conditions and external parts.

*3 Lx current limit is different from output current. *4 This specification is guaranteed by design engineering at -40°C to 105°C.

Application Examples of REDC's Automotive Products

REDC has an extensive portfolio of automotive products that features low power consumption, high-precision, high-reliability and small packaging. From solutions in body electronics and lighting, infotainment and passive safety to solutions in electric motorcycles and scooters, REDC offers a wide range of innovative technologies that enables our customers to succeed in today's marketplace.

Body Electronics & Lighting

Sliding Door Control	► Watchdog Timer R5104V
Electric Window Control	► Voltage Regulator R1150H +VD
Side Mirror Control	► Voltage Regulator R1514H/S R1524S
Door Handle Touch Sensor	► Voltage Regulator R1150H +VD
Advanced Driver Assistance Systems (ADAS)	► Voltage Regulator R1501J R8150S R1510S +VD R8152J R1513S R8154S R1515H/S R8156S
Millimeter-wave Radar	► Voltage Detector R8300N R8315N
Telematics	► Watchdog Timer
EV Inverter/Engine Control Unit	R5106N R8357G
Battery Charge Control Unit	R5109G R8358G
Various Control Unit	R5110S R8359G
DC/DC Converter Unit	R8355N R8360S R8356N
TPMS	► Voltage Regulator R1524N/S R8150S

Shift by Wire	► Voltage Regulator R1524N/S R8160N ► Watchdog Timer R8356N R8360S
PHEV Battery Charger	► Voltage Regulator R1514H/S
DRL (Daytime Running Lights)	► Voltage Regulator R1511S R1524S R1514S R8154H/S R1518J
Headlights	► Watchdog Timer R5110S
AFS	
Sonar	► Voltage Regulator R1517S
Wiper	► Voltage Regulator R1514S



IVI (In-Vehicle Infotainment)

Flap Touch Panel Sensor	► Voltage Regulator R1514H/S
Head-up Display	► Voltage Regulator R1501J R1524S ► Voltage Detector R3119N
Electric Steering Lock	► Watchdog Timer R5108G
Occupant Detection System	► Watchdog Timer R5110S
Steering Switch	► Voltage Regulator R1524S ► Voltage Detector R5106N

Navigation System	► Voltage Regulator R1114N R1180N R1130H R1190S/J R1150H +VD R1191N/H R1163N R1500H R1170H R1501S/J R1171S R1510S +VD R1172H/S R1513S
Audio System	► USB high-side Switch R5523N R5524N
Audio Visual Display System	
Bluetooth	
Tuner	
Communication module for EV	► Voltage Regulator R1172H R1180N
Data Communication Module	► DC/DC Converter R1270S RP506L

Passive Safety & Security

Air Conditioners

►Voltage Regulator

R8150S R8152S

Next Generation Security System

►Voltage Regulator

R1514H

Smart Entry

►Voltage Regulator


R1150H +VD R1514H/S

R1501J R1524N/H

R1510S +VD

►Watchdog Timer

R5105N

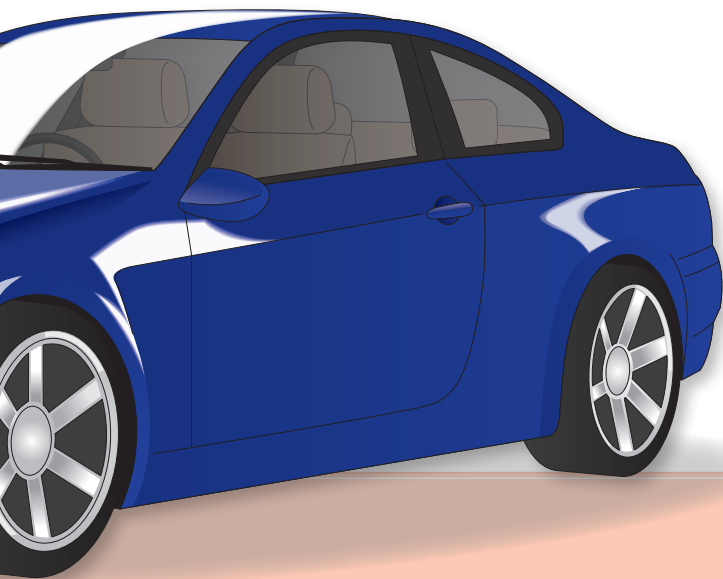

Sel-Dynamo

►Voltage Regulator

R1524S

►Watchdog Timer

R5106N

Smart Key

►Voltage Regulator

R1501S/J

Answerback

►Voltage Regulator

R1514H/S R1516H/S

R1524H/S

E-bike

►Voltage Detector

R1514H/S RP171N

R1515H/S

R1516H/S

R1524N/H/S

RP108J

RP132H/S/J

RP170H

R1501S

RP108J

R3116N R3118N R3134N

R3117N R3119N R3150N

►Watchdog Timer

R5104V R5106N R5108G

R5105N R5107G R5109G

►DC/DC Converter

R1211N R1270S RP506L

R1245S R1272S RP510L

R1290K R1273L RP550L

R1294L R1275S

Rear View Camera

Proximity Sensor ECU

Smart Rearview Mirror

Front View Camera

►Voltage Regulator

R1172N RP111N/H

R1501S/J RP170N

►DC/DC Converter

R1245L

►Watchdog Timer

R5107G

Automotive Instrument Panel Display

►Voltage Regulator

R1172H R8151H/S

R1180N R8152J

►Voltage Detector

R3150N R3151N

Antenna

►Voltage Regulator

R1524N/H RP170N



1. The products and the product specifications described in this catalog are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this catalog may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this catalog shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products in this catalog are designed for automotive applications. However, when using the products for automotive applications, please make sure to contact Ricoh sales representative in advance due to confirming the quality level.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this catalog.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used.
In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.
imagine. change.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)

3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre

Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH INTERNATIONAL B.V. - German Branch

Semiconductor Sales and Support Centre

Oberrather Strasse 6, 40472 Düsseldorf, Germany
Phone: +49-211-6546-0

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623